



LAARS[®] **NEOTHERM[®]**

*High Efficiency
Commercial Modulating,
Condensing Boilers*

PACKED WITH FEATURES

- Large Color Touch Screen
- Less than 10ppm NOx
- Up to 96.6% Thermal Efficiency
- 6 Models 285 to 850 MBH
- Vent up to 100 feet, horizontal or vertical
- Zero clearance to combustibles for tight installations

LAARS[®] 
Heating Systems Company

LAARS® NEOTHERM®

Hydronic Boiler



NeoTherm is a direct vent, sealed combustion, condensing boiler with thermal efficiency as high as 96.6% that modulates with a 5 to 1 turndown.



Low NO_x emissions (<10 ppm NO_x), for a package that's easy to use and easy on the environment.



Available for natural or propane gas, with a selection of factory mounted options, and 6 sizes ranging from 285 MBH, these indoor models are suitable for a broad variety of residential and commercial applications.




The boiler features an ASME stainless steel heat exchanger, optional boiler pump and LAARS integrated control system.



NEOTHERM INTEGRATED CONTROLS FEATURES:

- Large, easy to navigate color touch screen
- Easy to use menus for login, quick start, advanced setup, tests and diagnostics
- Integrated PID temperature and ignition control
- Accepts 4-10mA or 0-10VDC input for modulation
- Cascade up to 8 NeoTherm boilers
- Quick start feature for easy one boiler setups
- Outdoor reset with customizable reset curves, DHW override and warm weather shutdown
- Complete diagnostics for analog and digital inputs
- Test feature allows for forced min and max firing
- Display holds, alerts and errors in clear text form
- Password protected parameters for installer use

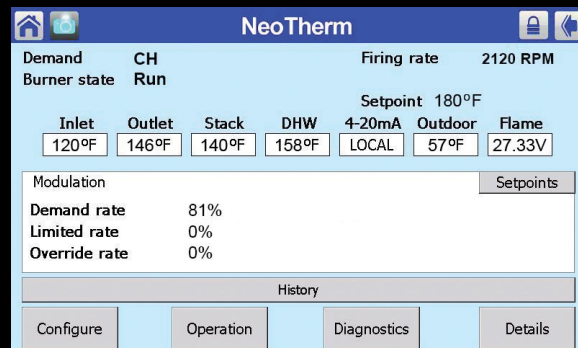

LAARS® NEOTHERM® HYDRONIC BOILER

Standard Equipment:


- High condensing efficiency
- Modulation down to 20% of full fire (5:1 turndown)
- Sealed combustion chamber
- Stainless Steel Heat Exchanger
- Pre-mix stainless steel burner
- Low NOx system (<10ppm) exceeds the most stringent regulations for air quality
- Horizontal or vertical direct vent
- Horizontal vent and air terminals
- Vent and air pipe lengths of up to 100 equivalent feet (each)
- Built-in condensate trap
- Vent temperature cutoff feature
- Integrates with Building Automation Systems
- Spark ignition system
- 160 psi maximum working pressure
- Stainless steel heat exchanger with welded construction (no gaskets)
- ASME "H" stamp
- 75 psi (517 kPa) ASME rated pressure relief valve
- Temperature & pressure gauge
- Drain valve
- Multiple pump control for boiler pump, system pump and indirect domestic water pump, each with delay
- Connections from top of unit
- ENERGY STAR® for 285 size only
- Electronic PID modulating control
- Large color touch screen
- Alarm output
- Accepts external 4-20mA modulation control (0-10V optional)
- Indirect water heater priority with sensor
- Outdoor reset with sensor
- On/off toggle switch
- Manual reset high limit
- Burner sight glass
- Zero clearance to combustibles surfaces for alcove and closet installations
- 10 year limited warranty

NeoTherm Boiler

Size	Thermal Efficiency %	Combustion Efficiency %	AFUE %	Input		Output		Connection Size (NPT)		Shipping Weight	
				BTU/h	kW	BTU/h	kW	Water	Gas	lbs.	kg
285	N/A	N/A	95.0	285,000	83.5	264,000	77.4	1 1/2"	3/4"	299	136
399	96.5	96.5	N/A	399,900	117.2	386,000	113.1	1 1/2"	3/4"	364	165
500	95.0	95.0	N/A	500,000	146.4	475,000	139.2	1 1/2"	1"	419	190
600	95.3	96.0	N/A	600,000	175.7	572,000	167.6	1 1/2"	1"	426	193
750	96.6	96.6	N/A	750,000	219.8	724,000	212.1	2"	1 1/2"	481	218
850	95.7	95.7	N/A	850,000	248.9	813,000	238.2	2"	1 1/2"	503	228

Dimensions are nominal.

Dimensional Data

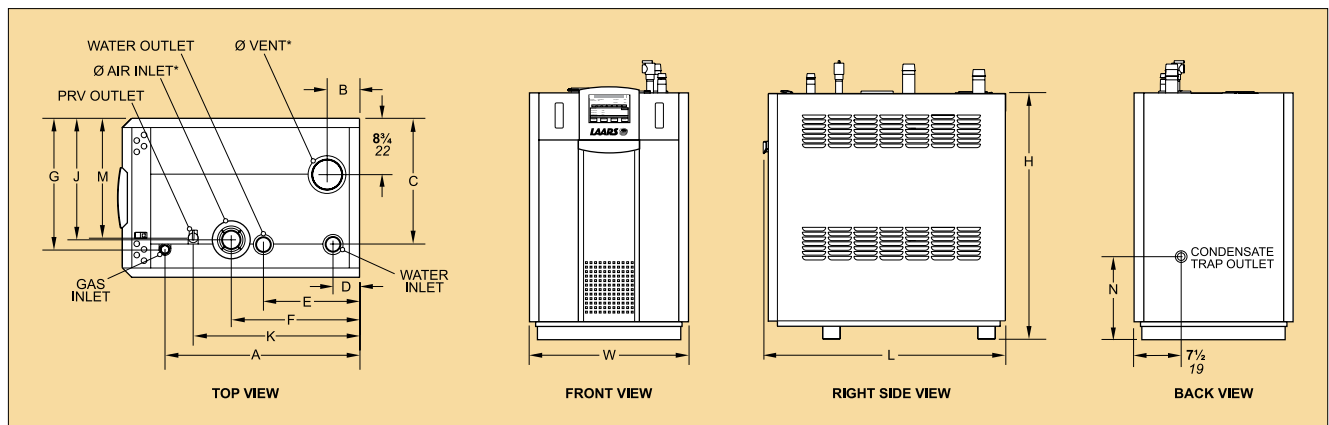

	W	L	A	B	C	D	E	F	G	H	J	K	M	N	Air Inlet Collar Diameter*	Vent Collar Diameter*
Size	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm	in. cm
285	25 64	26 3/4 68	20 1/4 52	7 1/4 19	19 3/4 50	4 1/4 11	11 1/4 29	13 1/2 34	14 36	38 1/4 97	15 38	17 43	18 3/4 48	13 33	4 1/2 11	4 1/2 11
399	25 64	31 1/2 80	25 64	5 1/4 13	19 3/4 50	4 1/4 11	14 3/4 37	18 1/2 47	19 1/4 49	38 1/4 97	16 1/2 42	21 3/4 55	18 3/4 48	13 33	4 1/2 11	4 1/2 11
500	25 64	37 3/4 96	30 1/4 77	5 1/4 13	19 3/4 50	4 1/4 11	15 1/2 38	20 51	20 1/2 52	38 1/4 97	19 48	26 66	18 3/4 48	13 33	4 1/2 11	4 1/2 11
600	25 64	37 3/4 96	29 3/4 76	5 13	19 1/2 50	4 1/4 11	15 38	20 51	3 8	38 1/4 97	19 48	26 66	18 3/4 48	8 1/4 21	4 1/2 11	4 1/2 11
750	25 64	51 130	35 1/2 90	6 15	19 1/2 50	5 1/4 13	19 48	40 1/2 103	3 1/4 8	38 1/4 97	19 48	30 3/4 78	18 3/4 48	8 1/4 21	4 1/2 11	6 1/2 17
850	25 64	55 1/4 130	39 3/4 101	6 15	19 1/2 50	5 1/4 13	19 48	44 3/4 114	3 1/2 9	38 1/4 97	19 48	35 89	18 3/4 48	8 1/4 21	4 1/2 11	6 1/2 17

*NeoTherm boilers are shipped with adapters for the air and vent collars that accept 4" or 6" pipe



View our entire product line at www.Laars.com



LAARS[®] 
Heating Systems Company

Customer Service and Product Support: 800.900.9276 • Fax 800.559.1583

Headquarters: 20 Industrial Way, Rochester, NH 03867 • 603.335.6300 • Fax 603.335.3355

9 Brigden Gate, Halton Hills, Ontario, Canada, L7G 0A3 • 905.203.0600 • Fax 905.636.0666

www.LAARS.com